

## Installation

**MEDIA MASTER**  
CD-REWRITABLE TECHNOLOGY

# 3

## Installing Your Software

The Ricoh MediaMaster Software Suite CD contains the following software programs:

- \* **Adaptec Easy CD Creator** - used for pre-mastering CD's
- \* **Adaptec Direct CD** - used for packet writing to your CD-R or CD-RW media
- \* **Seagate Backup Exec** - used for backing up and restoring data

### 1. Installation procedure

- Insert the Ricoh CD into your CD-ROM drive
- From the control panel, click Add/Remove programs
- Browse to the software application folder you wish to install
- Double click on the setup icon
- Follow the installation prompts

**Congratulations,**  
**your drive and software are now properly installed.**

## Technical Support

*If during the installation process you encounter difficulty you may contact the following sources for assistance:*


- [www.ricohcpg.com](http://www.ricohcpg.com) - for online answers to frequently asked questions
- (800) 442-8796 - for toll free FaxBack information
- (702) 352-1694 - for a Technical Support Technician from 7:00 AM to 5:00 PM Monday - Friday Pacific Standard Time

*It is recommended that you complete and send your registration warranty card. This will entitle you to software upgrades and other offers that will make your new drive even more enjoyable.*

**RICOH**<sup>®</sup>  
Image Communication

# READ ME FIRST!

**RICOH**<sup>®</sup>  
Image Communication

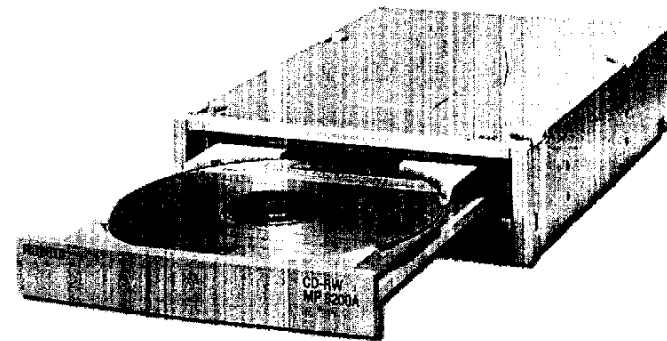

**MEDIA MASTER**<sup>™</sup>  
CD-REWRITABLE TECHNOLOGY

**MP6200A Internal  
ATAPI CD-RW Drive**

**CD-RW ATAPI QUICK START**

SKU # 333053-QS

Thank you for purchasing the Ricoh Internal ATAPI CD-ReWritable drive. Your new drive will give you the ability to play, record and re-write data to various types of CD-R and CD-RW media.

The first step in ensuring your CD-RW drive gives you years of pleasure and performance is proper installation. Follow these simple steps to install your drive properly.

## 1 Unpacking Your Drive

Before you begin installing your drive, take a moment to make sure you have all the necessary components.

- MediaMaster MP6200A drive
- IDE cable
- Mounting hardware
- Application CD
- User manual
- Warranty / registration card
- 1 piece of CD-Recordable media
- 1 piece of CD-ReWritable media
- Quick start guide



If you are missing a component in your kit, contact Ricoh Customer Service at (702) 352-1600 ext. 1622

Tools required:

You will need a Phillips screwdriver to install your drive.

### Important:


**Before installing your drive, be sure to record your drive's serial number in the space provided in your user manual. This number is required to obtain technical support.**

## 2 Installing Your Drive

Determine whether the drive will be installed as a Master or Slave. If you decide to set as a slave, make the appropriate change to the jumper on the back of the drive. (See figure below)

### 1. Install the drive


Mount your Ricoh MediaMaster drive horizontally in any available 5-1/4" bay using the mounting screws provided.

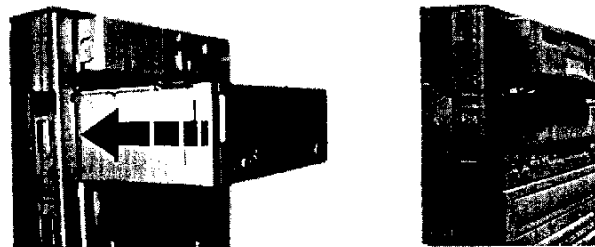


### 2. IDE cable connection

Connect one end of the IDE cable provided in your kit to the IDE connector on the back of your drive. Connect the other end of the cable to your motherboard's E-IDE port.

### Slave / Master jumpers



### Power cable

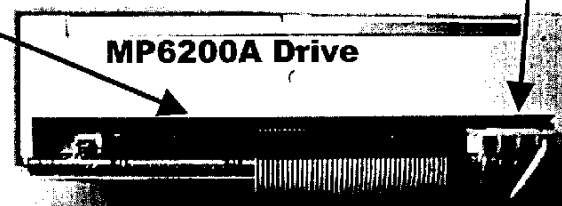

### 3. Power cable connection

Find an available 4-pin power supply cable attached to your computer's power supply and connect it to the back of your drive. *Note: If you do not have an available 4-pin power supply cable, you will need to purchase a power Y-cable available at your local computer store.*

### 4. Replace the computer case.

Reconnect the power cable to your computer.

Turn on your computer.

*If the drive is not recognized by Windows, ensure that the port is enabled in your system's BIOS. Refer to your system manufacturer's documentation.*